



Valve - exhaust air

KU

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10
- 11
- 12
- 13
- 14
- 15
- 16
- 17
- 18



Description

Valve for exhaust air.
Designed for wall or ceiling mounting.
Bayonet holders connect to socket VRGU, VRGL or VRGM.


Material

Painted galvanized sheet metal.

Colour

White RAL 9010, gloss 70, equivalent to NCS S 0502 Y.

Dimensions



Ød nom	ØD mm	m kg
80	110	0,13
100	130	0,19
125	160	0,27
150	188	0,36
160	190	0,38
200	245	0,58

Ordering example





Valve - exhaust air

KU

Technical data

Air flow, q [l/s] and [m³/h], total pressure drop, Δp_t [Pa], and A-weighted sound power level, L_{WA} [dB(A)], for different settings, a [mm], are shown in the graphs.

Sound power level in octave-bands, L_{Wok} [dB],

is calculated as $L_{Wok} = L_{WA} + K_{ok}$. K_{ok} is found in the table below.

Ød nom	Valve mounted in	Centre frequency [Hz]							
		63	125	250	500	1K	2K	4K	8K
100	Duct	-	-8	-5	-6	-6	-4	-12	-21
125	Duct	-	-11	-4	-6	-7	-3	-16	-25
160	Duct	-	-7	-4	-6	-3	-6	-18	-31
200	Duct	-	-7	-6	-7	-2	-9	-18	-27

Tolerance	-	±3	±2	±2	±2	±2	±2	±2	±3
-----------	---	----	----	----	----	----	----	----	----




Sound attenuation, ΔL , [dB]

Ød nom	Valve mounted in	Setting a [mm]	Centre frequency [Hz]							
			63	125	250	500	1K	2K	4K	8K
100	Duct	-12	21	18	12	14	12	11	12	15
		-5	21	16	9	11	9	8	8	12
		5	21	16	8	10	8	7	5	11
125	Duct	-17	22	16	11	9	7	7	9	12
		-9	21	16	9	8	5	5	7	8
		5	20	15	9	6	4	3	4	7
160	Duct	-15	19	14	9	8	6	7	9	10
		-5	19	13	9	6	5	4	6	8
		5	18	13	8	5	4	3	6	6
200	Duct	-25	17	12	10	9	9	12	14	12
		0	16	10	7	6	6	6	10	7
		20	16	10	6	4	4	5	9	6

Tolerance		±6	±3	±2	±2	±2	±2	±2	±3
-----------	--	----	----	----	----	----	----	----	----

Measurement of air flow

Data is available in a separate brochure.

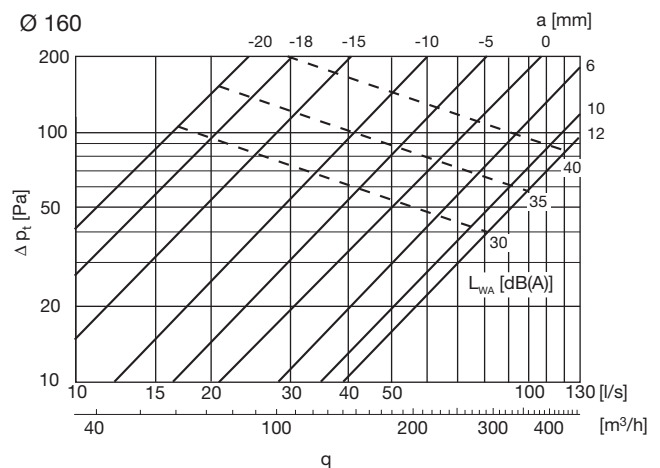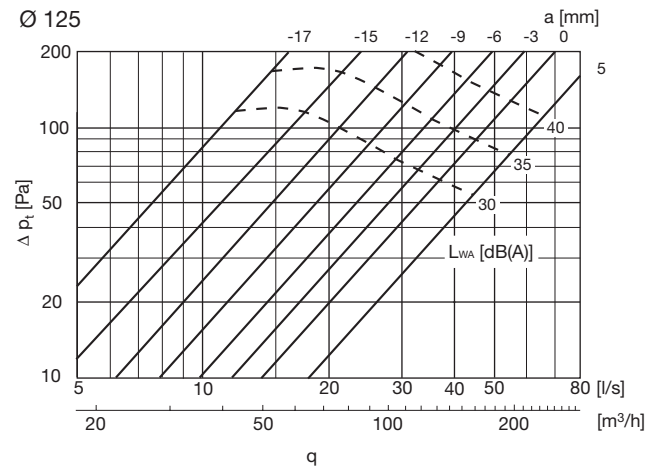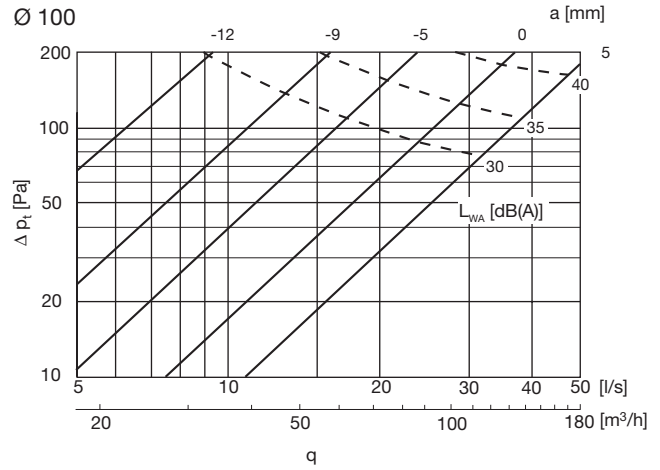

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10
- 11
- 12
- 13
- 14
- 15
- 16
- 17
- 18



Valve - exhaust air

KU

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10
- 11
- 12
- 13
- 14
- 15
- 16
- 17
- 18

