




Circular straight silencer

SLU 50

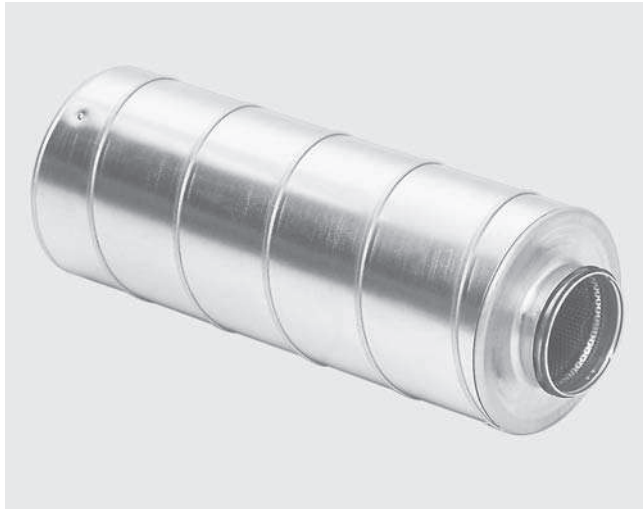


Description


Insulation thickness 50 mm.

For general information about the silencer's design, please refer to page 132.


Ordering example

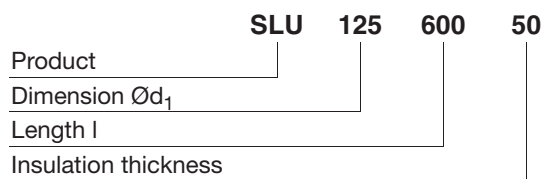

Technical data

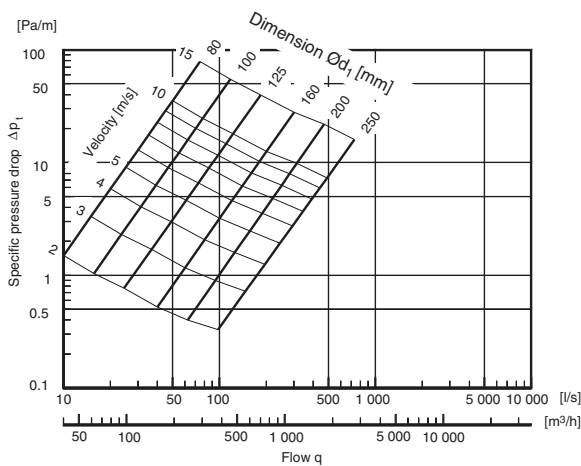

Dimensions

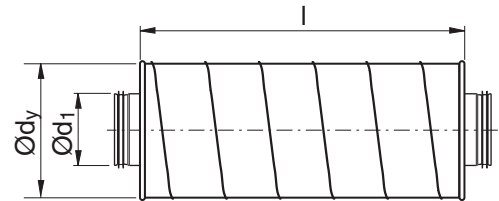

$\text{Ø}d_1$ nom	l mm	Attenuation in dB for centre frequency Hz								$\text{Ø}d_y$ mm	m kg
		63	125	250	500	1k	2k	4k	8k		
80	300	2	4	8	16	27	34	35	19	190	2,21
80	600	3	9	16	28	46	53	46	25	190	3,73
80	900	4	5	20	36	56	57	58	41	190	5,49
80	1200	5	6	23	40	62	61	62	45	190	6,90
100	300	3	4	8	14	23	27	25	14	210	2,64
100	600	3	8	13	25	40	50	40	21	210	4,80
100	900	3	5	18	33	53	55	48	28	210	6,25
100	1200	3	6	22	39	60	61	53	33	210	7,89
125	300	3	2	7	14	21	26	20	12	235	3,05
125	600	2	7	12	23	39	47	32	18	235	5,18
125	900	0	3	16	29	53	52	39	24	235	7,38
125	1200	0	3	18	37	60	59	52	28	235	9,05
160	300	3	2	5	12	17	24	17	11	270	3,45
160	600	3	4	8	21	37	40	22	14	270	6,30
160	900	0	4	12	27	46	51	29	20	270	8,88
160	1200	0	3	14	34	51	53	33	18	270	11,1
200	300	3	1	4	10	16	20	14	11	310	4,43
200	600	2	4	8	20	31	32	20	15	310	7,54
200	900	0	4	10	25	32	40	24	18	310	10,7
200	1200	0	4	13	32	51	48	28	17	310	13,3
250	600	1	2	6	15	27	25	15	14	365	9,30
250	900	0	2	8	22	37	34	18	16	365	12,8
250	1200	0	2	10	27	42	39	20	18	365	16,5
315	600	3	3	7	12	17	14	11	10	465	12,7
315	900	1	3	9	17	25	20	14	13	465	17,7
315	1200	2	3	12	24	37	23	17	15	465	23,0
400*	600	2	2	4	6	8	5	5	6	508	20,0
400*	900	2	3	5	10	12	8	6	8	508	26,0
400*	1200	3	3	7	13	16	10	7	9	508	29,0

* Supplied with two loose couplings